



5&2
WARRANTY
YEAR

SPEED-MASTER® 1600 L¹⁹

High Performance Door



Speed-Master® 1600 L¹⁹

High cycle applications up to 14'0" w x 16'0" h


Features

Application	Interior or exterior
Model / Classification	1600 L¹⁹ / Fabric
Size range	Maximum 14'0" w X 16'0" h
Technology	Direct-drive, sectional panel
Operating speed	Opening 60" IPS Closing 30" IPS
Panel	Patented, sectional design, heavy-duty aluminum hinge profiles Panel: reinforced, puncture resistant 1/8" thick 90 oz. / sq. yd. Bulldog XT material Colors: orange, blue, black, gray
Vision	Two full-width, clear PVC starting approximately 36" off floor
Custom panel imprints	Logos, photos or text digitally printed onto panel. UV treated and waterproof. Maximum image size 7'0" wide X 3'0" high
Resistance to wind load	Consult factory
Guide tracks	12 ga. galvanized steel 7-3/8" wide X 4-3/8" projection Optional: Windlocks
Hoods	Optional: Galvanized steel
Safety	8'0" high light curtain built into guide tracks
Control	Smart Start™ NXT NEMA 4X UL 208 to 575 v / 3-phase / 60 Hz voltage input Optional: Smart Start™ NXT NEMA 4X UL 1-phase available (Up to 10 x 10 only) Smart Start™ NXT HFCB NEMA 3 Non-UL 1-phase consult factory
Activation options	Push button / Pull cord / Motion detector / Presence detector Induction loop detector (wire/sealant by others) / Remote control Touchless switch (several models) Consult factory for additional options
Accessories	LED Lite-Advance / ScanProtect / Wireless Crash Alert / Remote Keypad / Energy Analysis Report
Emergency	Chain hoist Optional: UPS emergency battery pack Non-UL (With HFCB 1-phase control box only)
Compliance	Door complies with requirements of UL325
Warranty	5 & 2 Year: Motor/gearbox (excluding catch) and panel material 5 years, materials & workmanship. All other mechanical and electrical components free from defects, 2 years



For demanding high cycle locations

Design advantages such as zero moving parts within the guide tracks and direct-drive motor, support walk-away dependability. For exterior mounting doors, options like a roll and motor cover along with motor / gearbox heater make it possible to accommodate high traffic exterior door applications during cold weather.

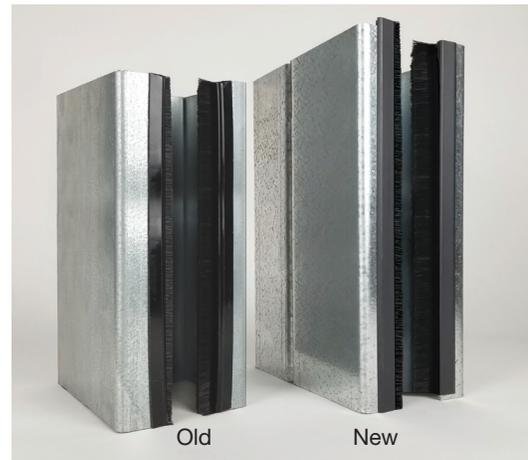

Two piece guide tracks

Heavy-duty two-piece guide tracks with brush seal fit into any application. Overall dimensions: 7-3/8" wide X 4-3/8" projection.

USA

Toll Free: 800.365.3667
Email: info2@hormann.us
Website: hormann.us

Canada

Toll Free: 866.792.9968
Email: info@hormann.ca
Website: hormann.ca

