




DOOR FEATURES

Effective Joint Seals

Snug-fitting tongue-and-groove section joints reduces wind and weather from entering the garage.

Foamed-In-Place Polyurethane Insulation Thermally efficient with a U-factor* of .15 and an R-value** of 12.12

Heavy Gauge Steel End Caps Wrap-around end caps trim out door edges for better appearance, improved strength and protect the insulation from damage.

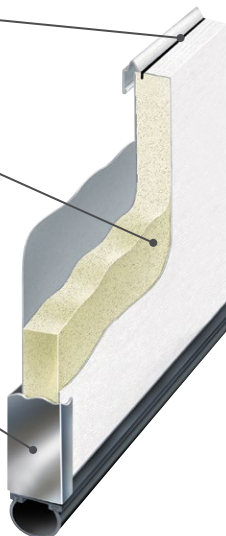

Silent Glide Rollers

Nylon rollers with solid steel shafts provide years of smooth, quiet and dependable operation.

High Cycle Spring Option

Choose a 25,000 cycle spring for more than twice the life of a standard torsion spring.

Wind Load Options Available

with structural reinforcements for use in coastal or high wind regions.


Limited Lifetime Warranty



*U-factor is independently tested and verified per ANSI/DASMA 105 using solid doors and specific product sizes.

**Wayne Dalton uses a calculated door section R-value for our insulated doors.

1 Panel



Flush Panel

2 Choose Your Color

Modern Metallic Finishes



Silver



Dark Bronze



Black Frost

3 Choose Your Windows



Clear Long



Clear Short



Double Narrow



Narrow

Optional Window Placement


Vertical Option
(left or right)




Double Row Option
(top and intermediate)



Vertical and Horizontal
(left or right)



All Window Option



Glass Options



Clear*




Gray Tinted
Tempered



Green Tinted
Tempered



Bronze Tinted
Tempered




Satin Etched*
Privacy




Obscure*

*Also available in Tempered and Insulated


4 Choose Your Decorative Hardware




Arrow




Aspen




Barcelona



Bean



Conifer



Fleur De Lis



Spear

THERMAL PERFORMANCE



Wayne Dalton participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of sectional garage doors. The lower the U-factor rating, the better the thermal performance.



Symbol indicates verified U-factor rating in accordance with the DASMA Thermal Performance Verification Program.

Wayne Dalton

2501 S. State Hwy. 121 Bus., Ste 200
Lewisville, TX 75067

wayne-dalton.com

